



## Safety Cable Kit Quick Setup Guide

This *Quick Setup Guide* provides step-by-step instructions on how to secure outdoor Ruckus Wireless™ devices using the Safety Cable.

### SUPPORTED DEVICES

The devices can be any Ruckus Wireless ZoneFlex™ Access Point using the single-arm (non-sheet metal) mounting.

#### NOTE:

Ruckus Wireless products must be installed by a professional installer.

### PACKAGE CONTENTS


- One safety cable
- This *Quick Setup Guide*

### REQUIRED TOOLS AND SUPPLIES


- Phillips screwdriver
- 7/16" hex socket
- Ratchet wrench
- Torque wrench
- Torque screwdriver

### CABLING INSTRUCTIONS

- 1 Thread the safety cable around the hanger mount and thread the eye end through the loop end.

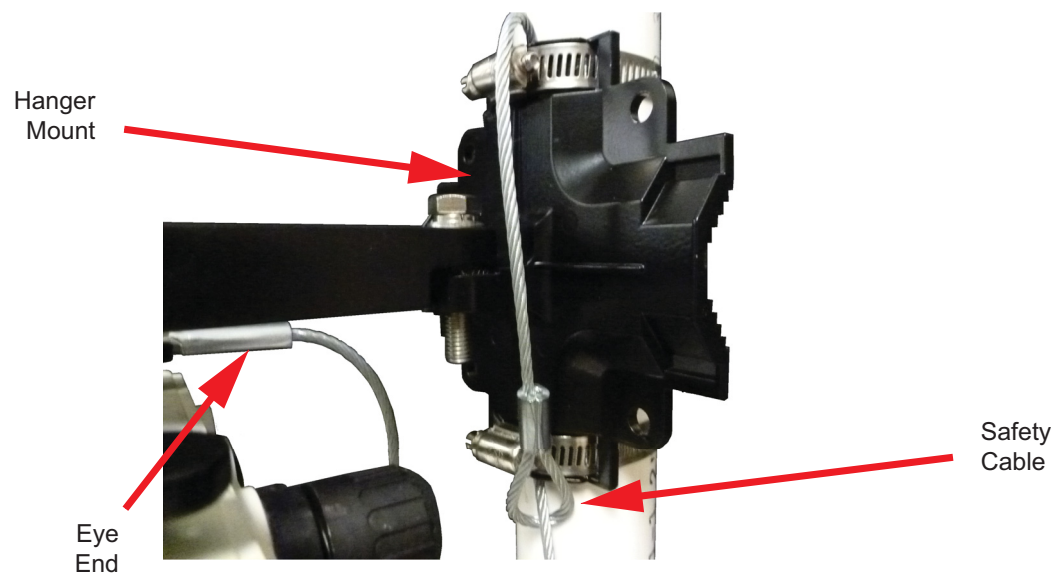

- 2 Remove one fastener (screw or bolt) from the AP mounting bracket.
- 3 Push the fastener through the safety cable eye end and reattach the fastener to the AP.
- 4 Tighten the fastener to secure the AP mounting bracket to the AP. Fastener torque value must be 2.5-3.0 N.m or 22-27 in-lbs.

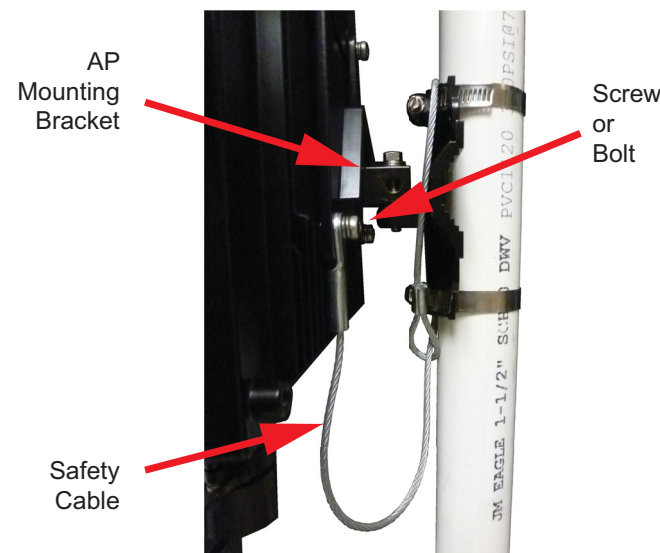

RUCKUS Wireless LLC is a wholly owned subsidiary of CommScope, Inc.